


## 6:1 DOWNHAUL

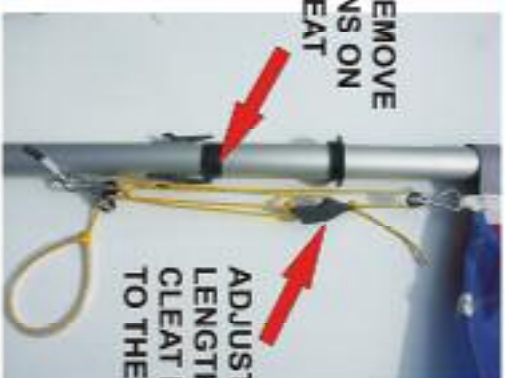

TAPE OR REMOVE THE HORNS ON THE CLEAT

ADJUST ROPE LENGTHS SO CLEAT IS TIGHT TO THE BOOM

## 'KICKER' TYPE DOWNHAUL



The simple cleat on the aft face of the mast may have to be removed and blanked off with aluminium rivets or the 'horns' could be trimmed back

## CLAMCLEAT TYPE DOWNHAUL

## HALYARD LOOP

- USE 750mm OF 3mm ROPE and a 4mm BOBBLE
- SMOOTH THE EDGES OF THE TOP MAST CRANE
- TURN THE CRANE TO FACE FORWARD
- DRILL A 5mm HOLE IN THE BOBBLE
- FEED A LOOP OF ROPE THROUGH THE BOBBLE
- TIE THE SAIL AS SHOWN
- TENSION THE ROPE BY PULLING OVER THE FRANGES AS IN DIAGRAMS 6&7

## NEW RULES APRIL 2005

PLEASE ASK IF YOU REQUIRE FURTHER ASSISTANCE.

DAVE COCKERILL

07967 701 281  
01243 379 444



4



5



1



2



3



6



7